

Home ■ Megoldások ■ I szapkezelés ■ Fekáliaiszap-kezelés

HUBER Solutions for Septic Sludge Treatment


Where wastewater treatment is decentralized, septic sludge is produced, and must be evacuated, collected and treated in a centralized plant. Where possible, this is done at a centralized wastewater treatment plant with sufficient surplus capacity; but where such a plant is not available nearby, a special septic sludge treatment can be built.

Septic sludge needs to be pretreated to remove disturbing solids (e.g. debris) and heavy solids (grit and gravel). We offer various well-proven products for [sewage sludge screening](#), that are successfully in operation since decades on a global scale.

The mechanically pre-treated septic sludge is dewatered in our [Screw Presses](#). After composting, the treated septic sludge is land applied as fertilizer and for soil improvement.


We treat filtrate from sludge dewatering in a HUBER Membrane Bio-Reactor and recycle the effluent as process water (wash and spray water). Surplus effluent can be reused for irrigation.

Berendezés koncepciója

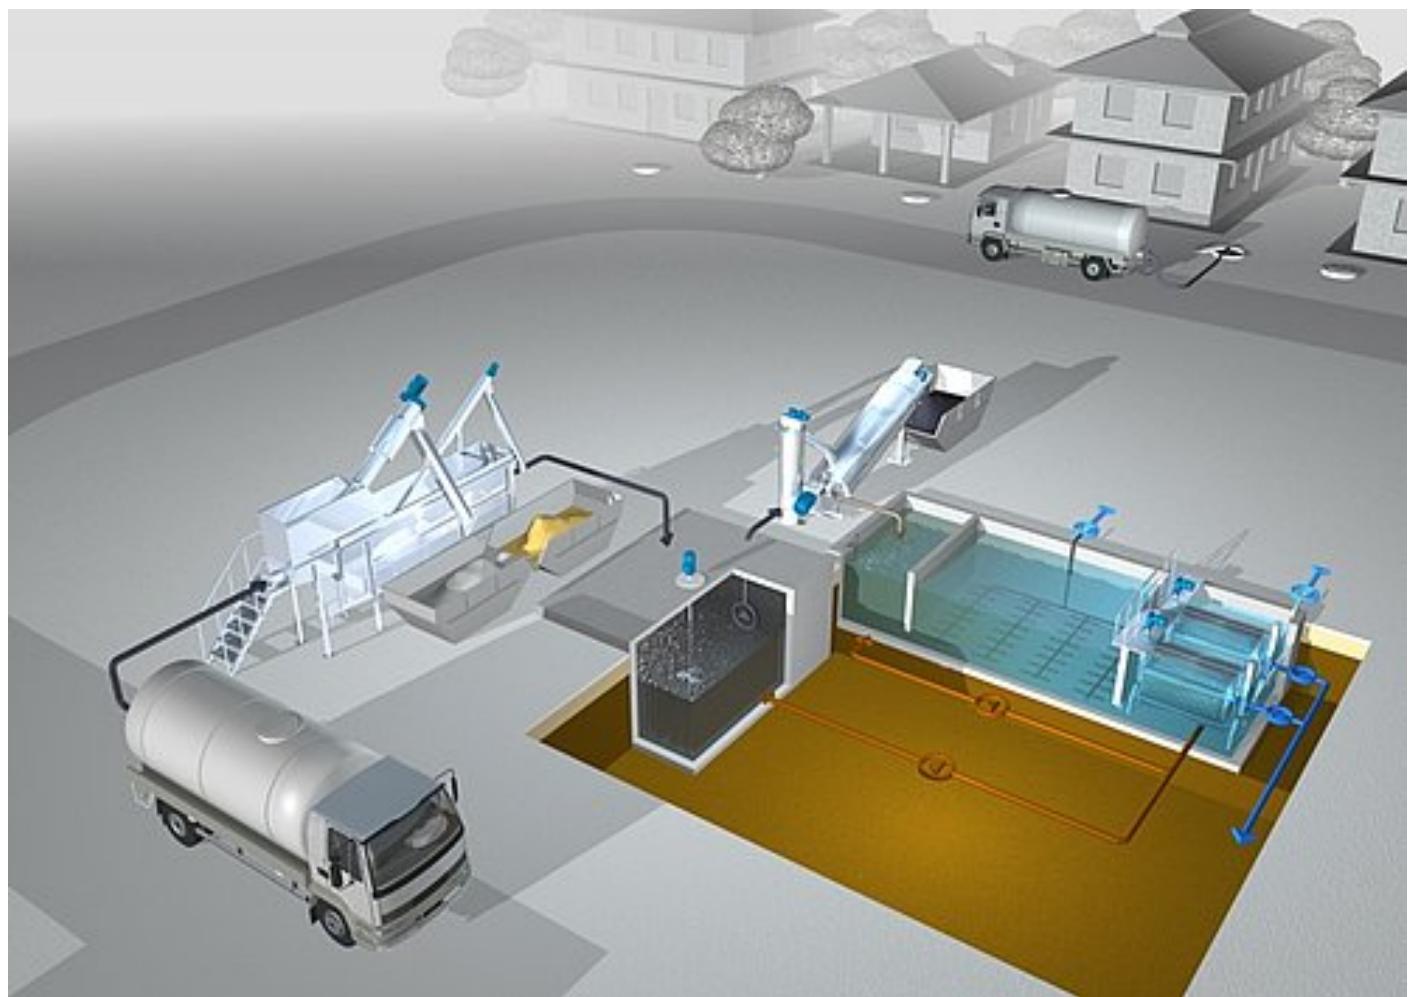

A részletes információkat tartalmazó nagyobb, interaktív megjelenítéshez és további linkekhez kattintson a képre

Folyamatleírás

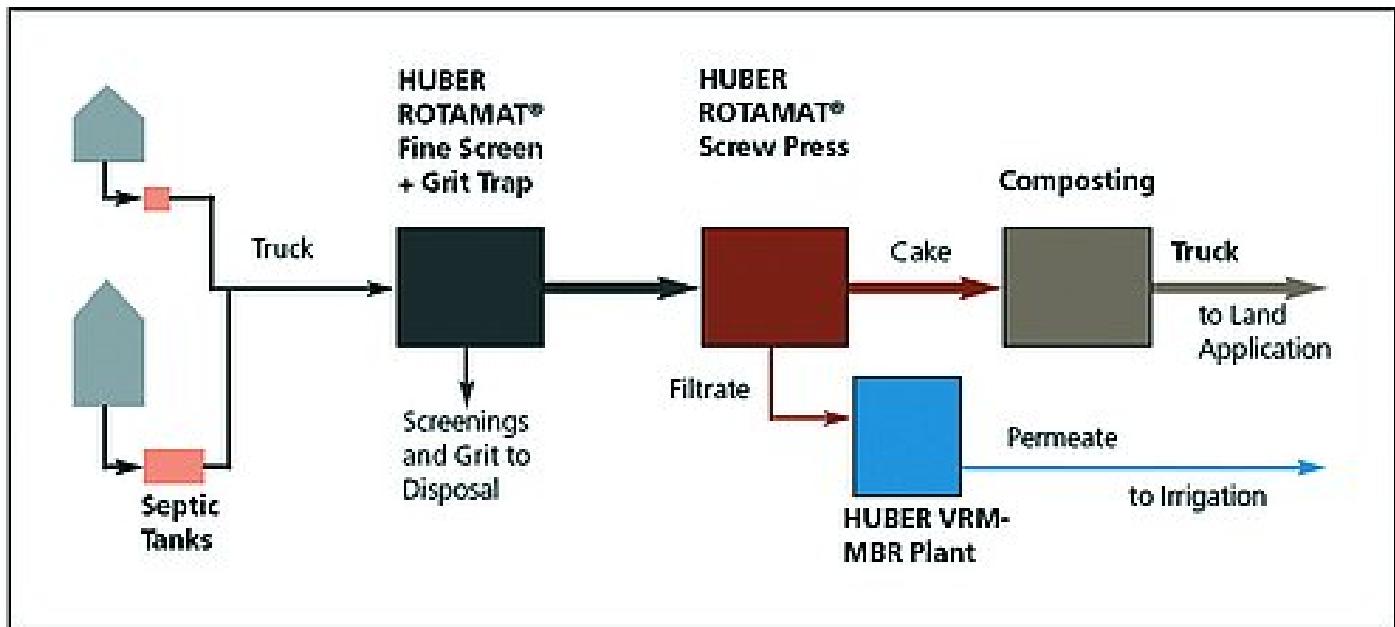

System Description

Septic sludge smells like foul eggs and is highly corrosive. It contains grit and gravel as well as all kinds of debris that can pass through a commode.

Septic sludge is supplied with tanker vehicles and directly discharged into a HUBER [ROTAMAT® Complete Plant](#) for complete mechanical pre-treatment. A Fine Screen and Grit Chamber are integrated in this unit. The fine screen simultaneously washes, dewateres and compresses the removed screening, which are disposed of as solid waste. Mineral solids are removed from the grit chamber and classified; then they are washed and dewatered in our [Grit Washer](#). The well washed mineral product is reusable as construction material, e.g. for road bedding.

After all disturbing solids have been removed by pre-treatment, the septic sludge is dewatered in our [ROTAMAT® Screw Press](#). The sludge cake is then composted for aerobic stabilisation and pathogen reduction.

Alternatively, thin septic sludge is concentrated in our [ROTAMAT® Screw Thickener](#) and then stabilized in an anaerobic digester. The generated digester gas is used for cogeneration of power and heat. Sludge dewatering occurs after digestion.

The produced compost or digested sludge is land applied as fertilizer and for soil improvement, or used as soil material for landscaping or land reclamation.

We treat the filtrate from sludge dewatering in a [HUBER Membrane Bio-Reactor](#). The effluent containing no solids and bacteria is recycled as process water (wash and spray water). Surplus effluent can be used for irrigation (it contains dissolved N and P nutrients).

All HUBER machines are completely enclosed to prevent odour nuisance, and the entire HUBER equipment is made of corrosion-resistant stainless steel.

Tapasztalatok

- [Well Received Septic Sludge in Finland](#)
- [Mineral fertiliser from sewage sludge](#)

Downloads

[Letöltés: HUBER SeptageTreat® Solution - Septic Sludge Treatment for Reuse \(angol nyelven\)](#) [pdf, 305 KB]

Fényképek





Termékek

- HUBER Fekáliafogadóállomás ROTAMAT® Ro3.3 Kompaktberendezés
- HUBER Fekáliaiszap-dob RoFAS
- HUBER Csigaprés S-PRESS
- HUBER Csigás sűrítő S-DRUM
- HUBER Homokmosó RoSF4 T

A HUBER csoport képviselete



Silex Water Technologies Kft.
H-8230 Balatonfüred
Fürdő u. 17/B.
Magyarország

Tel. +36 87 580 140
Fax +36 87 580 139
Email info@huber-technology.hu
WWW www.huber-technology.hu